

GS14M




- A** Removable lid with mechanical lock
- B** Filtration (auto and manual) and lighting controls
- C** In-ground section containing:
 - Filter pump (14m³/h)

INTEGRABLE OPTIONS :

- By pass
- Salt chlorinator

- D** Removable filter cartridge with leaf basket
- E** Wide-mouth suction skimmer
- F** 2 Multi-directional return nozzles
- G** Colour LED spotlight + Remote control
- H** Overflow
- I** Low-level suction

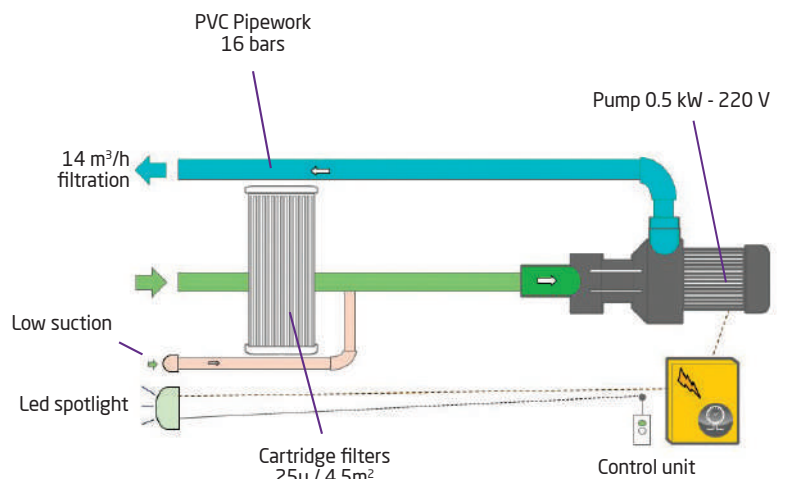

Technical drawings of the 'Kühlschrank' (refrigerator) showing front, top, and side views with dimensions in mm.

Front View: The refrigerator has a total width of 710 mm and a total height of 1750 mm. The upper door is 1150 mm wide and 650 mm high. The lower door is 1150 mm wide and 1100 mm high. The bottom section is 650 mm wide and 100 mm high. The side panel is 1150 mm high and 650 mm wide.

Top View: The refrigerator has a total width of 710 mm and a total depth of 650 mm. The upper door is 1150 mm wide and 650 mm deep. The lower door is 1150 mm wide and 1100 mm deep. The bottom section is 650 mm wide and 100 mm deep. The side panel is 1150 mm high and 650 mm wide.

Side View: The refrigerator has a total width of 710 mm and a total height of 1750 mm. The upper door is 1150 mm wide and 650 mm high. The lower door is 1150 mm wide and 1100 mm high. The bottom section is 650 mm wide and 100 mm high. The side panel is 1150 mm high and 650 mm wide.