




GS14M | VT €



- A** Removable lid with mechanical lock
- B** Filtration (auto and manual) and lighting controls
- C** In-ground section containing:
 - Filter pump (14m³/h)
 - **Salt chlorinator**, consisting of reverse polarity cell and electronic unit for automatic treatment.
 - **By pass**, for re-routing the circulating water flow to a heat pump, for example.
- D** Removable filter cartridge with leaf basket
- E** Wide-mouth suction skimmer
- F** 2 Multi-directional return nozzles
- G** Colour LED spotlight + Remote control
- H** Overflow
- I** Low-level suction

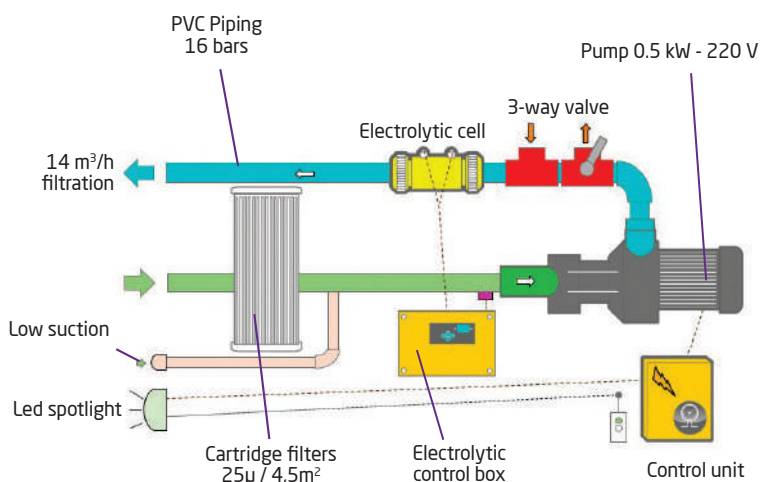

GS14 Dimensions

