

GS14 MIRROR WITH BY-PASS & CHLORINATOR & PH CONTROLLER


GS14M VT E PH



Equipment


- Removable lid with mechanical lock
- B Filtration (auto and manual) and lighting controls
- In-ground section containing:
 Filter pump (14m³/h)
 - **Salt chlorinator,** consisting of reverse polarity cell and electronic unit for automatic treatment.
 - **PH controller**: peristaltic pump and integrated circuit board to control the PH level.
 - **By pass**, for re-routing the circulating water flow to a heat pump, for example.

- Removable filter cartridge with leaf basket
- (E) Wide-mouth suction skimmer
- 2 Multi-directional return nozzles
- G Colour LED spotlight + Remote control
- Overflow
- Low-level suction

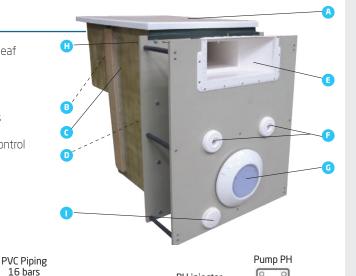

Schematic diagram



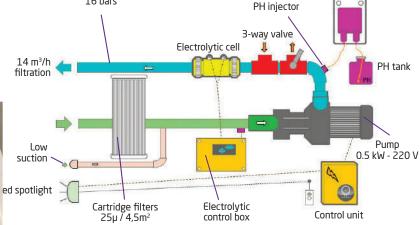

GS14 Dimensions

