

GS14 MIRROR WITH BY-PASS & PH CONTROLLER

GS14M **VT PH**




Equipment

- Removable lid with mechanical lock
- Filtration (auto and manual) and lighting controls
- In-ground section containing:
 - Filter pump (14m³/h)
 PH controller: peristaltic pump and integrated circuit board to control the PH level.
 - **By pass**, for re-routing the circulating water flow to a heat pump, for example.

INTEGRABLE OPTIONS:


Salt chlorinator

- Removable filter cartridge with leaf basket
- Wide-mouth suction skimmer
- 2 Multi-directional return nozzles
- G Colour LED spotlight + Remote control
- Overflow
- Low-level suction



Schematic diagram



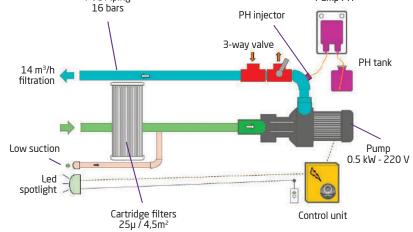

GS14 Dimensions

