

GS14 WITH BY-PASS & CHLORINATOR & PH CONTROLLER

GS14 | **VT E PH**



Equipment

- Removable lid with mechanical lock
- Filtration (auto and manual) and lighting controls
- In-ground section containing:


 Filter nump (1.4 m³/b)
 - Filter pump (14m³/h)
 Salt chlorinator, consisting of reverse polarity cell and electronic unit for automatic treatment.
 - **PH controller**: peristaltic pump and integrated circuit board to control the PH level.
 - **By pass**, for re-routing the circulating water flow to a heat pump, for example.

- Removable filter cartridge with leaf basket
- © Wide-mouth suction skimmer
- 2 Multi-directional return nozzles
- Colour LED spotlight + Remote control
- Overflow



Schematic diagram



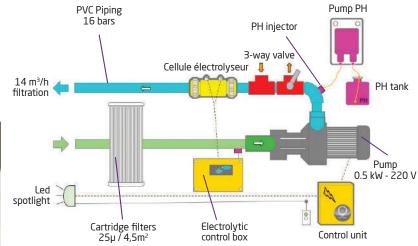

GS14 Dimensions

