

GS8 AVEC BY PASS & ELECTROLYSEUR

GS8 VT E






Equipment

- Removable lid with mechanical lock
- Filtration (auto and manual) and lighting controls
- In-ground section containing:


 Filter nump (9 m³/b)
 - Filter pump (8 m³/h)
 Salt chlorinator, consisting of reverse polarity cell and electronic unit for automatic treatment.
 - **By pass**, for re-routing the circulating water flow to a heat pump, for example.

- Removable filter cartridge with leaf basket
- Wide-mouth suction skimmer
- 1 Multi-directional return nozzles
- White LED spotlight + Remote control
- Overflow

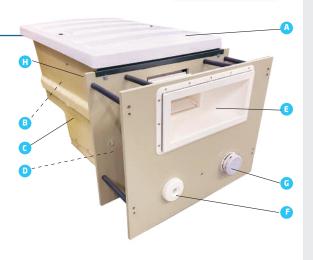

Schematic diagram



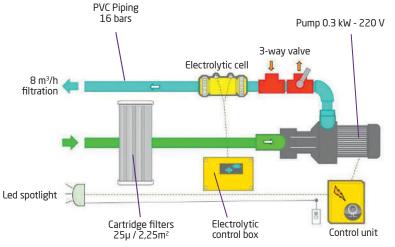

GS8 Dimensions

