

GS8 AVEC BY PASS & ELECTROLYSEUR & RÉGULATEUR PH

GS8 VT E PH





Equipment


- Removable lid with mechanical lock
- B Filtration (auto and manual) and lighting controls
- In-ground section containing:
 Filter pump (8 m³/h)
 - **Salt chlorinator,** consisting of reverse polarity cell and electronic unit for automatic treatment.
 - PH controller: peristaltic pump and integrated circuit board to control the PH level.
 - **By pass**, for re-routing the circulating water flow to a heat pump, for example.

- Removable filter cartridge with leaf basket
- Wide-mouth suction skimmer
- 1 Multi-directional return nozzles
- White LED spotlight + Remote control
- Overflow



Schematic diagram



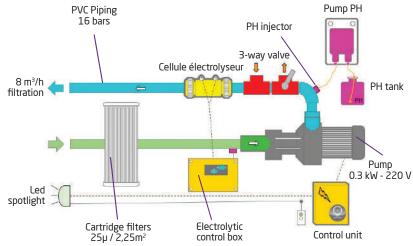

GS8 Dimensions

