

MX AVEC NAGE À CONTRE-COURANT ÉLECTROLYSEUR AU SEL & RÉGUL. PH

MX 18 | CNE PH






Equipment


- Removable lid with mechanical lock
- Filtration (auto and manual) and
- B lighting controls.
 - In-ground-section containing :
- Filter pump (18 m³/h)
 - **Salt chlorinator,** consisting of reverse polarity cell and electronic unit for automatic treatment.
 - **PH controller :** peristaltic pump and integrated circuit board to control the PH level.
 - **Counter-current system** driven by a second pump, separate from the filtration, and operated by a pneumatic switch.

- Two removable filter cartridges with leaf baskets
- Balneotherapy (air control dial)
- **(F)** Skimmers, two water suction inlets
- Multi-directional, high-volume return nozzle
- H White LED spotlight + Remote control > Colour optional

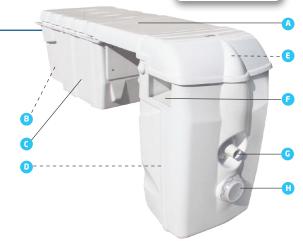

Schematic diagram



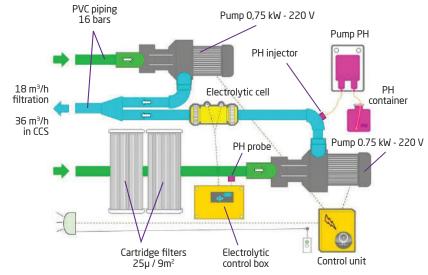

MX Dimensions

